


6"-300# R.F.S.O.  
 FLG. W/ SCH. 80  
 PIPE x 7 5/8" LG.  
 (2) PLC'S.

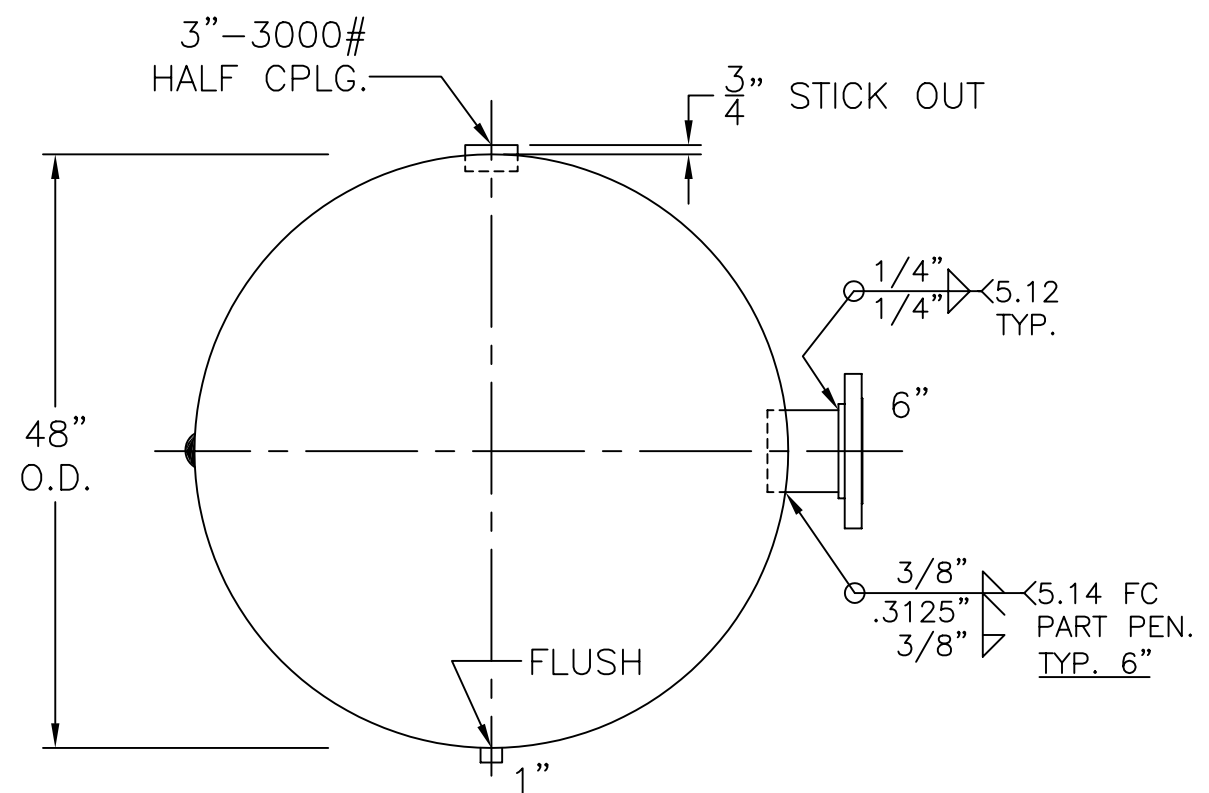

VIEW W/O SUPPORTS

2) ALL CPLGS. ARE 3000#-HALF EXCEPT 1/4"-FULL.  
 NOTE: 1) HYDRO TEST @ 393 PSIG. MIN.

SHELL/HEADS	.375" SA-455 2:1 S.E. (.365" MIN.)	48-HD-1060-W	REV. 11-8-06
			DATE: 3-1-91
		FOR: HANSON STANDARD	
		HORIZ. AIR TANK	
	.422" SA-455		
		INSIDE: UNPAINTED	
	M.A.W.P. 300 PSIG. @ 400 °F		
	M.D.M.T. -20 °F @ 300 PSIG.	OUTSIDE: PRIME	
	ASME. SECTION VIII DIV. 1, 2004 ADD 2005	CAD-"B" UNDER "STD"-SERIES	
	X-RAY: RT-4 SPOT L.S. & HDS. G.S.	BY: E.S.	SCALE: 3/4"=12"
	GALLONS: 1060	WT. 3290 LBS.	<b>ROY E. HANSON JR. MFG.</b> 1600 E. WASHINGTON BLVD. LOS ANGELES, CA 90021
	SERIAL NO.		
	N.B.		

SUPT'S PER:  
 MA-102-6C